


ROLLER FAIRLEADS

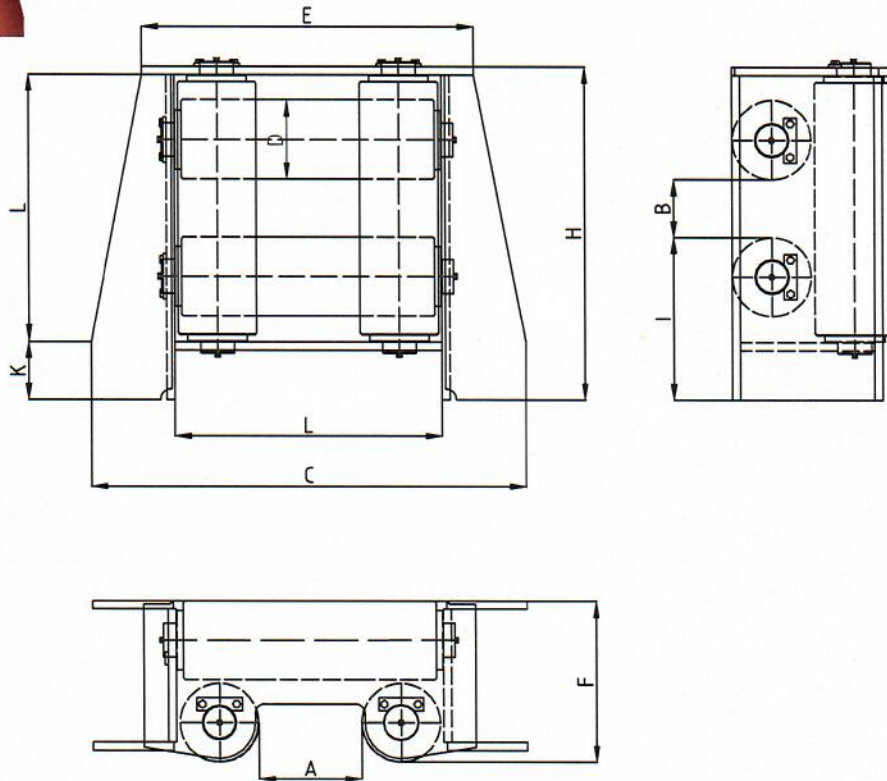

Casing	:	welded construction
Standard bearing	:	bronze slide bearing, seawater resistant, with grease lubrication
Special bearing	:	polyamide / bronze bearing (free of maintenance)
Mounting	:	bronze / stainless steel bearing
		free on deck

Type	SWL (kN)	Wire ϕ	A	B	C	D	E	F	H	I	K	L	Weight (kg)
BW8F	50	-12	180	100	650	80	446	170	456	208	80	356	75
BW10F	100	-16	230	130	800	100	546	210	571	258	100	446	130
BW12F	140	-20	250	130	900	120	626	250	656	308	120	506	220
BW14F	200	-24	280	160	1000	140	716	288	726	328	120	576	320
BW18F	320	-32	300	160	1200	180	836	366	852	398	140	676	580
BW24,5F	640	-40	320	180	1350	245	1030	500	1035	505	180	830	1100
BW30F	1000	-48	400	250	1700	300	1236	610	1260	583	200	1016	2210

Dimensions in mm, alterations may occur



Lemans Nederland B.V.
 Canadaweg 8
 4661 PZ Halsteren
 The Netherlands

Tel.: +31(0) 164 680097
 Fax: +31(0) 164 681971
 E-mail: info@lemans-nederland.eu
 Website: www.lemans-nederland.nl